Specifications

P/N 152661

Pin Header Series:

PH

Features:
Notched for easy separation into desired positions
Side to side, end to end stackable.

Ratings:

Current	3A
Contact resistance	15mΩ
Insulation resistance	1,000MΩ
Operating temperature	-40°C / +105°C

Material:

Plastic	PBT Glass-filled, UL94V-0
Contact	Phospher Bronze

ORDERING PROCEDURE

1 - 2 / 3 - 4 5

For thru-hole series:
1) Series
2) Connector side dimension
3) Solder side dimension
4) Positions
5) Plating

For surface mount and 2.00mm series:
1) Series
2) Positions
3) Plating

Plating Options:
1 = Full flash gold
5 = Tin
6 = Selective flash gold
7 = Selective 10µ gold*
8 = Selective 30µ gold*
* May require minimums

Please refer to following pages for ordering examples.

Series: PH

Pin Header 2.54mm Surface Mount

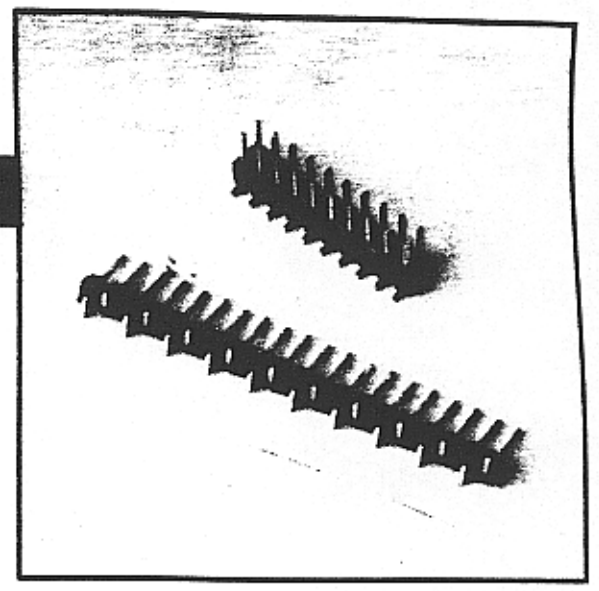

PH6 - 1 to 40 Positions
PH7 - 2 to 80 Positions

PH6

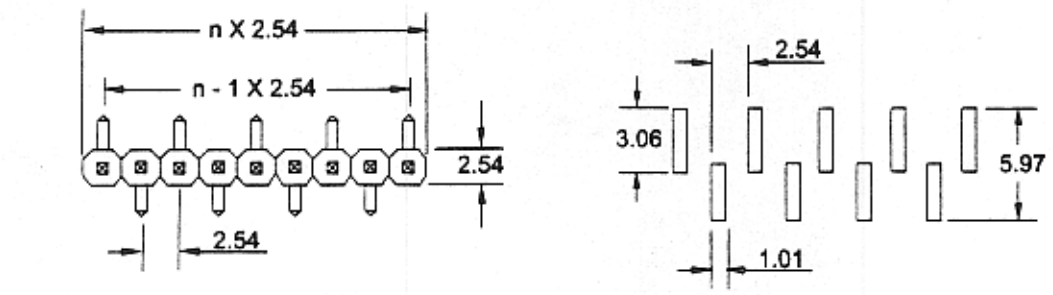

PC Board Layout

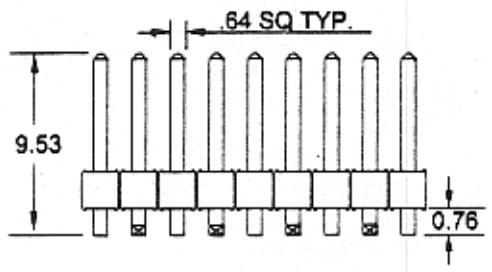



PH7

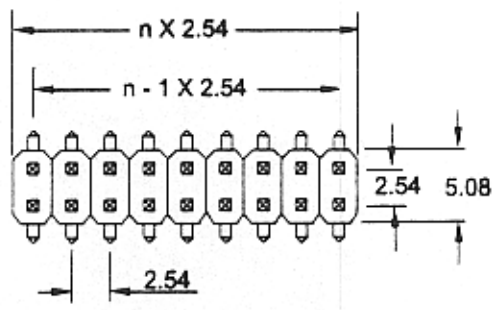



PC Board Layout

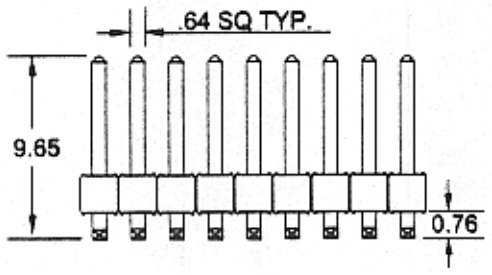



Ordering example: **PH6 - 34 1**